

SONANCE


MARINER MX DATA SHEET

MX52 SST

TECHNICAL SPECIFICATIONS

SKU	MX52 SST 93615 - White 93614 - Black
UOM	Each
Tweeter	0.75" (19mm) cloth dome, Ferrofluid-cooled, acoustic back chamber, dual voice coil
Woofers	5.25" (130mm) textured polypropylene cone, rubber surround, dual voice coil
Dispersion Technology	Sinusoidal Textured Waveguide
Frequency Response	65Hz-20Hz +/-3dB
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling	5 Watts minimum; 90 Watts maximum
Sensitivity	87dB SPL (2.83V/1 meter)
Environmental	Mill Spec 810 for humidity, salt spray, temperature, UV; IP66 waterproof rating
Environmental Temp	-13° to 149°F (-25°C to 65°C)
Grille Material	Perforated aluminum
Color	White (RAL 9003) or Black (RAL 7021)
Dimensions without Bracket (WxHxD)	6.38" x 10.08" x 6.02" (162mm x 256mm x 153mm)
Dimensions with Bracket (WxHxD)	6.38" x 11.02" x 6.46" (162mm x 280mm x 164mm)
Shipping Weight	6lbs (2.8kg) each

DIMENSIONAL DRAWINGS

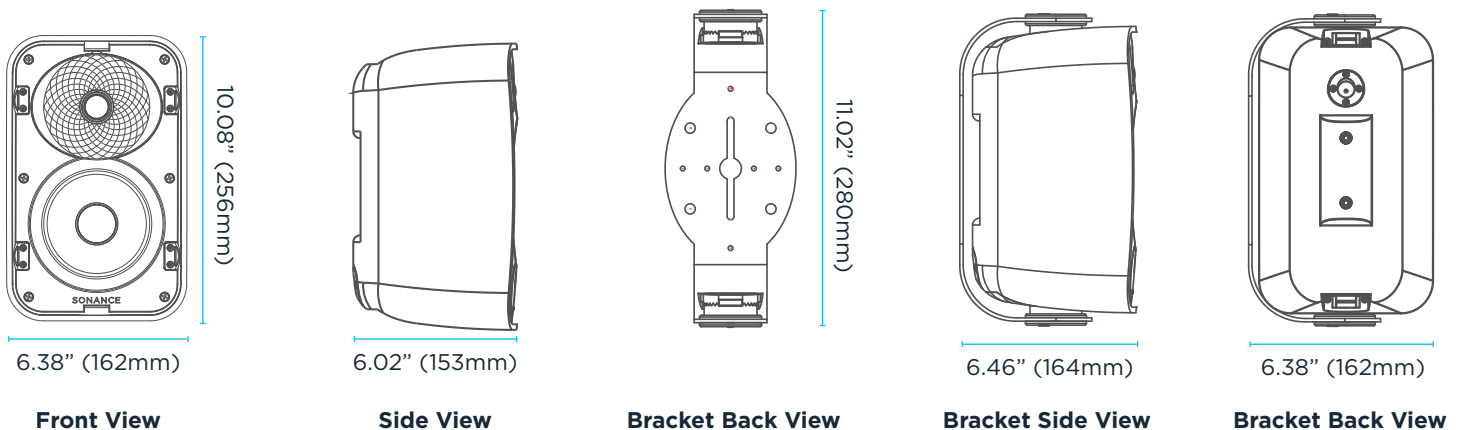

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 07.21.2024